

QT-400

Flexibel Tee 4" x 4" x 4" Cast Iron, Plastic, Steel, Copper or Lead



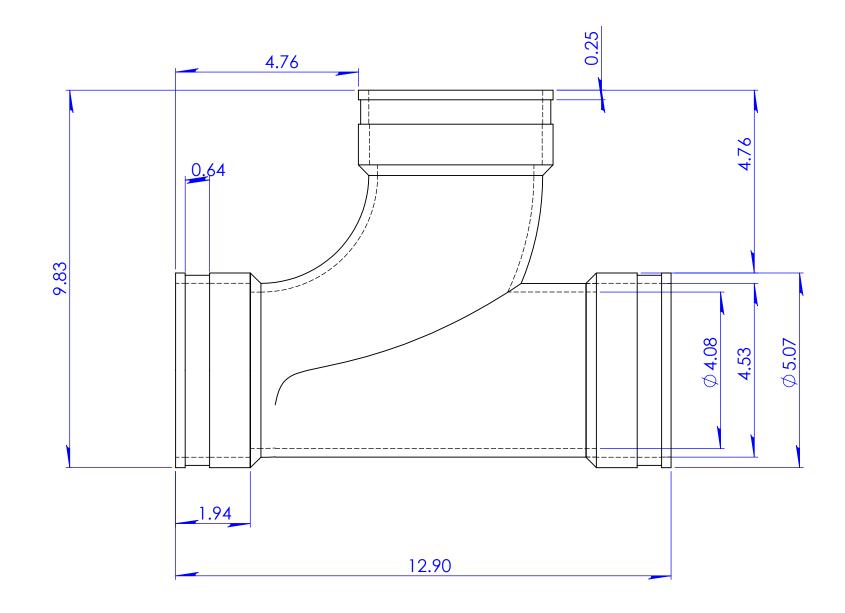



(317) 346-4110 www.drainagesolutionsinc.com

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FERNOO INC

TOLERANCES:
.X= Fractional ±
$.XX = \pm .06$
ANG.= $\pm 3^{\circ}$
UNLESS OTHERWISE SPECIFIED

-	Part Weight	3.46 lbs.	Installation Torque	60" Lbs.	UNITS:	SIZE:	DES
	Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926	INCHES	A	
	Pressure Tested	4.3 PSI	Clamps used	300 Series	3RD ANGLE PI	ROJECTION	СН
	Material	Flexible PVC 60 Duro Shore A	Box Quantity		DO NOT SCAL	E DRAWING	

	DESIGNER:		SCALE:
		not to scale	
,	CHECKER:	DATE: 6/2/2011	SHEET 1 OF 1